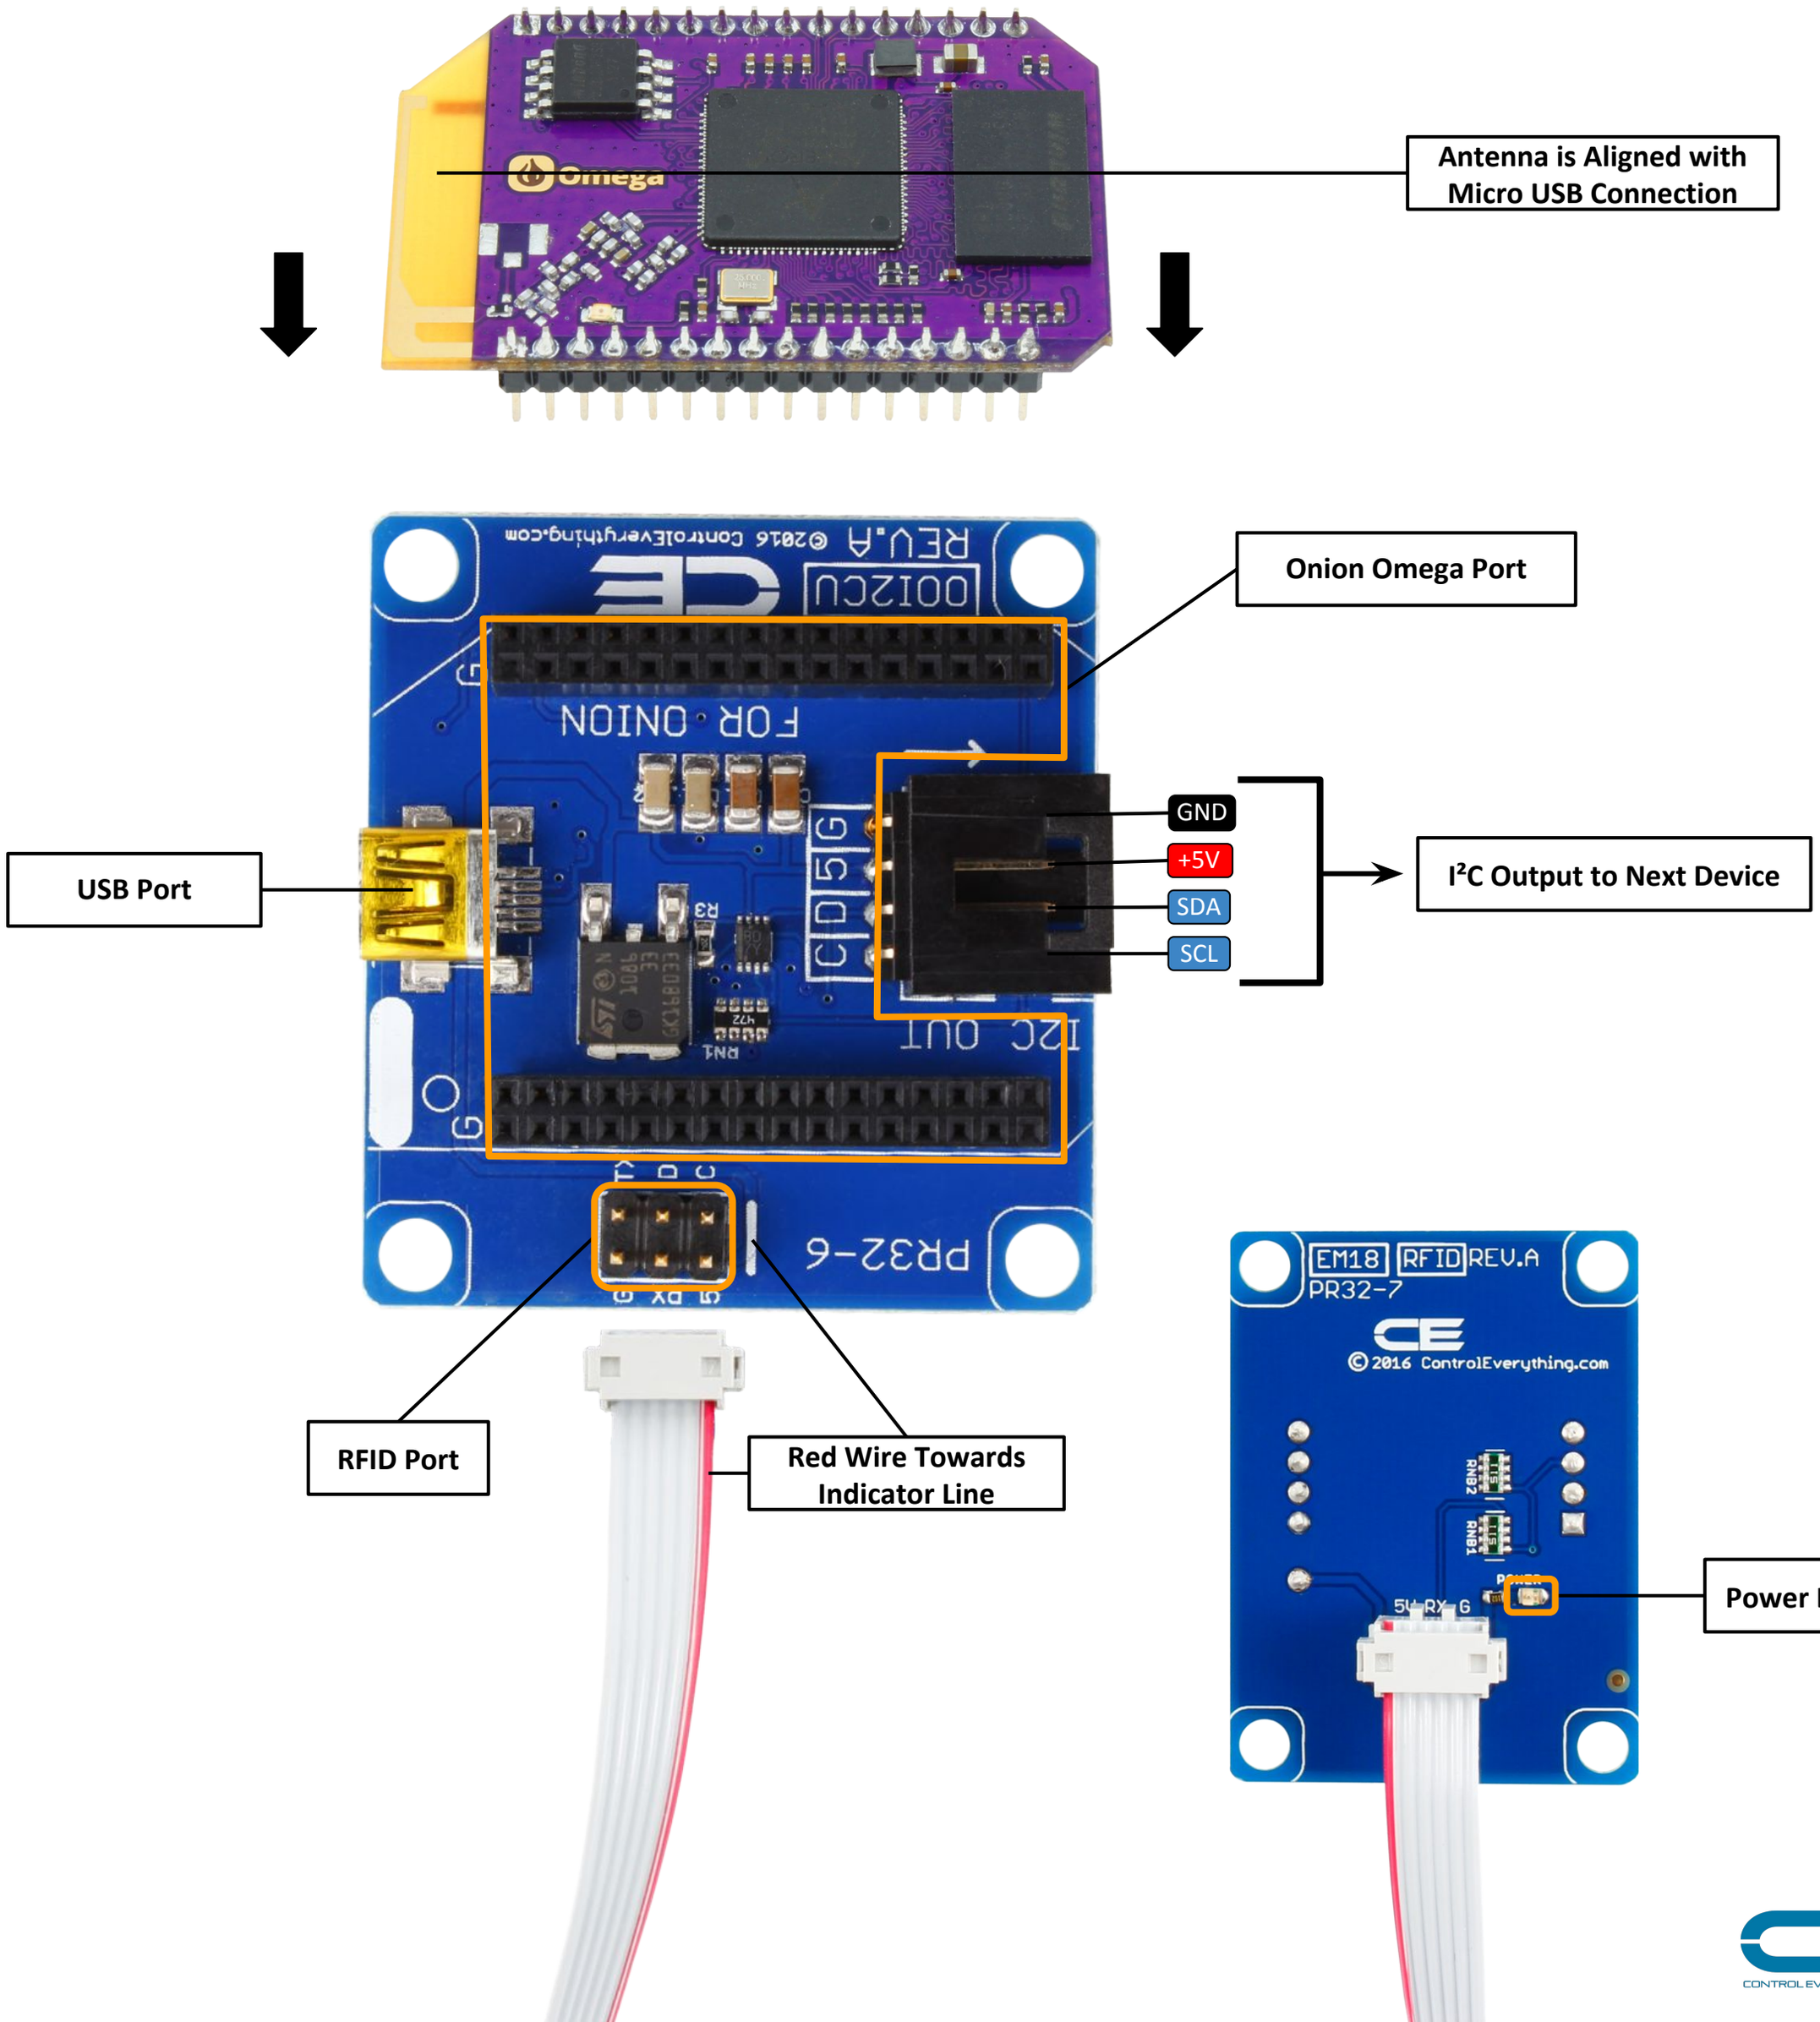
Antenna is Aligned with Micro USB Connection
Onion Omega Port
USB Port
GND
+5V
SDA
SCL
I²C Output to Next Device
RFID Port
Red Wire Towards Indicator Line
Power LED